

Secure Analog Fax Communication

The Ingenium Fax ATA Provides Plug-and-Play Device Connectivity to Traditional Fax Machines to the Cloud for Secure Document Delivery

Organizations transitioning to IP-based networks need a cost-effective solution to integrate existing fax machines. The Ingenium Fax ATA, analog-terminal-adaptor offers a simple, plug- and-play device that allows any traditional fax machine to be extended to the etherFAX network. The Ingenium Fax ATA, powered by EtherFAX and manufactured by MultiTech, connects existing analog fax machines to the EtherFAX network, allowing faxes to be sent and received via the cloud, instead of the PSTN. The device allow organizations to leverage existing IT infrastructure and eliminate the cost and maintenance of fax lines.

The Ingenium Fax ATA device simplifies the transition to IP-based infrastructure without adding complexity and ongoing maintenance. It is also transparent to users, so no training is required to send and receive faxes.


The Ingenium Fax ATA device also supports the etherFAX Secure Exchange Network (SEN), allowing data-sensitive enterprises to integrate remote fax machines from various locations into their own private fax network. SEN ensures secure data and document transmissions and reliability without compromising security.

Through its infrastructure as a service (IaaS) model, etherFAX and etherFAX SEN leverage a vast array of virtual ports, making them available to send and receive high volumes of fax transmissions while removing the need for costly telephony infrastructure. The ability to integrate with all leading fax servers, fax-enabled applications, multi-function devices and fax machines allows for fast and easy configuration.



Product Features

- Plug-and-play configuration
- Never busy in-bound
- Works with all fax machines
- Extends traditional fax machines to the cloud
- SEN enabled (provides end-to-end encryption)
- Zero interoperability
- Up and running in 2 minutes

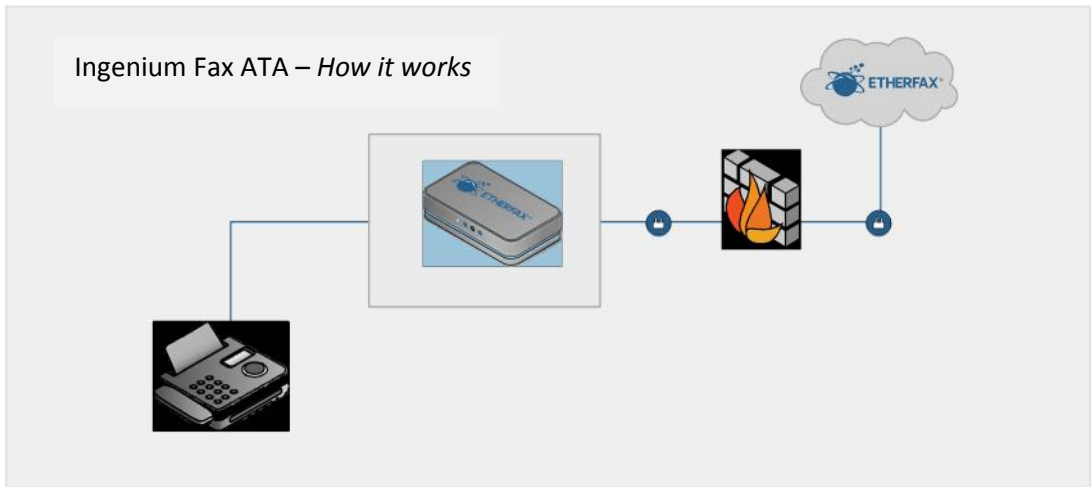

Model	MT200A2E-EF
Technical Specifications	
FAX Mode	ITU-T V.34: 33600, 28800, 24400 (TCM) ITU-T V.17: 14400, 12000, 7200 (TCM) ITU-T V.29: 9600, 7200 (QAM). ITU-T V.27ter:4800, 2400 (DPSK). ITU-T V.21
Fax Interface	ITU-T T.31--- Class 1 FAX
Fax Data Speed	Up to 33600
Voltag	9V DC @ 600mA
Connectors	
LAN Connectors	RJ45
Dial Connector	RJ11
Reset	Reset push button switch
Power Connector	2.5mm miniature

Physical Description	
Physical Dimensions (LxWxH)	2.89" x 4.75" x 1.58: 7.34cm x 12.06cm x 4.01cm
Physical Weight	0.28 lbs 0.127 Kg
Chassis Type	Plastic
Environmental	
Operating Temperature**	32° to 158° F 0° to 70° C
Storage Temperature	-40° to 185° F -40° to 85° C
Humidity	Relative humidity 20% to 90% noncondensing
Certifications	
EMC Compliance Certifications	FCC Part 15, EN55022 Class B, EN55024
Safety Certifications	UL60950-1, cUL60950-1, IEC60950-1, AS/NZS60950-1

